

Handy Dri / Hair Drier

Warm air dryers





Handy Dri / Hair Drier

Warm air dryers are the cleanest, cheapest way of providing hand- and hair-drying facilities.

We've developed three types: the Handy Dri hand-dryer, available in manual 1.4 and 1.8kW models, and a 1.4kW 'no-touch' model; the Handy Dri 24, a 'no-touch' model rated at 2.4kW for fast hand drying; and the Hair Drier, which is ideal for hotel bedrooms, nursing homes, health clubs and sports centres.

Each of our hand- and hair-dryers is covered by a two year guarantee with on-site support.



Handy Dri / Hair Drier

Handy Dri 24

The Handy Dri 24 range offers hygienic 'no-touch' automatic on / off hand drying.

Its multi-directional air jet concentrates the flow of air to ensure that hands are dried comfortably, quickly and economically.

- 2.4kW @ 240V for rapid hand drying.
- Tamper-proof fixings and flush wall-mounting ensure maximum protection against vandalism and theft.
- Automatic on / off function controlled by infrared proximity switch for hygienic hand drying.
- Heavy duty steel housing with a choice of satin chrome, chrome or white.





Handy Dri

The Handy Dri range consists of three models offering a choice of push-button or 'no-touch' operation and provides a comfortable balance between temperature and air flow for safe and effective drying.

- 1.4kW (Handy Dri 14) and 1.8kW (Handy Dri 18) push-button operated units.
- Alternative 1.4kW 'no-touch' unit (Handy Dri 14E).
- Automatic switch-off after 30 seconds.
- Handy Dri 14E has automatic switch-off via sensor.
- High efficiency fan and air flow system.
- Stylish, compact design.



Hair Drier

A safe, easy to use, wall-mounted hair drier for use in hotel bedrooms, nursing homes, health clubs and sports centres. Drying time can be set from one to ten minutes with an automatic 'off' function to prevent continuous running. The timer can also be manually over-riden to switch the drier off.

- Styling suitable for modern interiors.
- No safety hazards from plugs and cords.
- Wall-mounted for added security.
- Powerful 1kW element for fast drying.
- User-adjustable one to ten minute running time.
- 1.4m flexible hose and swivel nozzle.
- Timer with automatic switch-off.

Full specifications

Handy Dri 24

Specification

Rating

2.4kW @ 240V (2.2kW @ 230V).

Weight

6.6kg unpacked, 7.5kg packed.

Outer casing

Vandal-resistant steel with a choice of satin chrome, chrome or white enamelled finish. Tamper-proof cover screws.

Nozzle

Chrome plated zinc. 360° swivel.

Heat unit

Open coil wound on a former.

Motor / fan

Compact high-performance fan with ball bearings for longer life (approx. noise level 80dB +/- 3dB (A)).

Air speed

20 m/s.

Air volume

51 l/s.

Approx. drying time

28 seconds.

Safety features

Heater and fan motor protected by auto reset thermostats. Automatic power inhibit to protect against irregular use. Infrared proximity switch.

Ingress protection

IPX1.

Installation

Fixing

The Handy Dri 24 is intended for wall-mounting only. Wall fixings supplied.

Electrical

Cable entry from rear or bottom of unit. Check the mains electrical supply is within the range 230V to 240V 50/60Hz before connecting the Handy Dri 24.

The Handy Dri 24 must be installed by a qualified electrician. All electrical work must comply with the relevant parts of both the latest BS 7671 (IEE Wiring Regulations) and part P Building Regulations. Special requirements must be observed when installed in bathrooms.

Guarantee

Handy Dri 24 carries a full five year transferable on-site service support guarantee against faulty manufacture or materials provided that:

- It has been correctly installed as per the instructions contained in the instruction manual and all relevant Codes of Practice and Regulations in force at the time of installation.
- It has been installed in the UK.
- It has not been modified in any way, other than by Heatrae Sadia Heating.
- It has not been tampered with or been subjected to misuse or neglect.
- Within 60 days of installation the user completes and returns the certificate supplied along with the proof of purchase to register the product.

Evidence of purchase and date of supply must be submitted. The guarantee is transferable.

This guarantee does not affect your statutory rights.

Handy Dri

Specification

Rating

Handy Dri 14 / 14E – 1.4kW @ 240V, (1.3kW @ 230V).
Handy Dri 18 – 1.8kW @ 240V, (1.7kW @ 230V).

Outer case

White thermoplastic. Class II double insulated.

Heat unit

Unit construction heater bank.

Motor / fan

Compact high-performance fan with ball bearings for longer life. (approx. noise level 67.5 dBA @ 1.5m).

Safety features

Motor and element protected by safety cut-outs. Safety timer prevents continuous running.

Ingress protection

IP23.

Installation

Fixing

Base assembly secured to the wall by three-point fixing.

Electrical

Cable entry at rear. May be connected to a ring final circuit via a fused spur with a double-pole linked isolating switch with 13A minimum breaking capacity. All electrical work must comply with the latest BS 7671 (IEE Wiring Regulations). Special requirements of the BS 7671 (IEE Wiring Regulations) for location and isolation should be observed when installed in bathrooms.

Guarantee

Handy Dri carries a full two year transferable on-site service support guarantee against faulty manufacture or materials provided that:

- It has been correctly installed as per the instructions contained in the instruction manual and all relevant Codes of Practice and Regulations in force at the time of installation.
- It has been installed in the UK.
- It has not been modified in any way, other than by Heatrae Sadia Heating.
- It has not been tampered with or been subjected to misuse or neglect.
- Within 60 days of installation the user completes and returns the certificate supplied along with the proof of purchase to register the product.

Evidence of purchase and date of supply must be submitted. The guarantee is transferable.

This guarantee does not affect your statutory rights.

Hair Drier

Specification

Rating

1kW @ 240V, (0.9kW @ 230V).

Outer case

White thermoplastic. Class II double insulated.

Heat unit

Unit construction heater bank.

Motor / fan

Compact high-performance fan with ball bearings for longer life (approx. noise level 63.5 dBA @ 1.5m).

Safety features

Motor and element protected by safety cut-outs. Maximum running time 10 minutes.

Ingress protection

IP22.

Installation

Fixing

Base assembly secured to the wall by three-point fixing.

Electrical

Cable entry at rear. May be connected to a ring final circuit via a fused spur with a double-pole linked isolating switch with 13A minimum breaking capacity. All electrical work must comply with the latest BS 7671 (IEE Wiring Regulations). Special requirements of the BS 7671 (IEE Wiring Regulations) for location and isolation should be observed when installed in bathrooms.

Guarantee

Hair Drier carries a full two year transferable on-site service support guarantee against faulty manufacture or materials provided that:

- It has been correctly installed as per the instructions contained in the instruction manual and all relevant Codes of Practice and Regulations in force at the time of installation.
- It has been installed in the UK.
- It has not been modified in any way, other than by Heatrae Sadia Heating.
- It has not been tampered with or been subjected to misuse or neglect.
- Within 60 days of installation the user completes and returns the certificate supplied along with the proof of purchase to register the product.


Evidence of purchase and date of supply must be submitted. The guarantee is transferable.

This guarantee does not affect your statutory rights.



Dimensions and ordering

Dimensions – Handy Dri 24

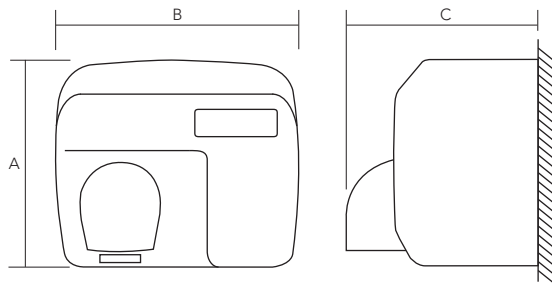


Model	A (mm)	B (mm)	C (mm)
Handy Dri 24	248	284	202

Ordering guide


Model	Rating @ 240V (kW)	Product code
Handy Dri 24 White	2.4	95:020:090
Handy Dri 24 Chrome	2.4	95:020:091
Handy Dri 24 Satin Chrome	2.4	95:020:092
Handy Dri 14	1.4	95:020:081
Handy Dri 14E	1.4	95:020:082
Handy Dri 18	1.8	95:020:083
Hair Drier	1	95:020:084

Dimensions – Handy Dri

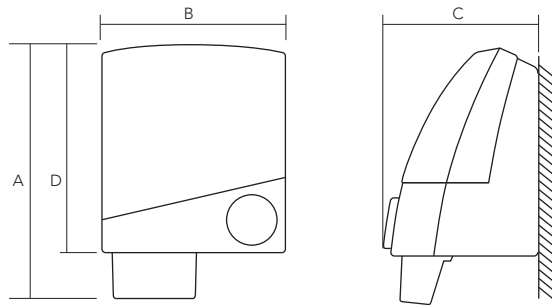

Model	A (mm)	B (mm)	C (mm)	D (mm)
Handy Dri	282	203	164	226

Dimensions – Hair Drier

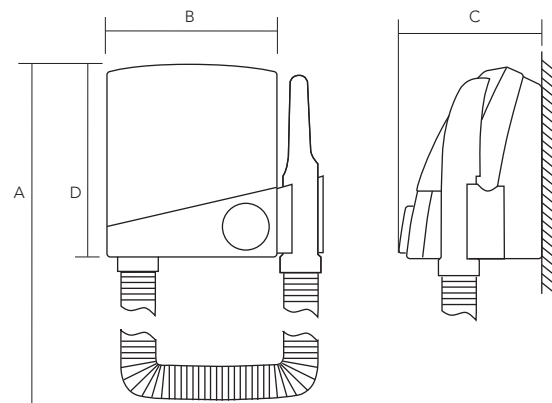

Model	A (mm)	B (mm)	C (mm)	D (mm)
Hair Drier	660	203	172	226

Contact

Specification

T: 01603 420220 F: 01603 420229

E: specifier@heatraesadia.com

After Sales Service

T: 0844 871 1535 F: 0844 871 1528

E: heatraesadiaservice@heateam.co.uk

Web www.heatraesadia.com

National service network

Heatrae Sadia products are inherently reliable and are designed to meet the demanding needs of all users.

A nationwide network of experienced engineers is available to provide fast and efficient on-site service support.

In addition, spare parts for the complete range of products are readily available through a wide variety of stockists.

Heatrae Sadia Heating Hurricane Way Norwich Norfolk NR6 6EA

Heatrae Sadia Heating may introduce modifications to their products from time to time. Consequently, the details given in this brochure are subject to alteration without notice.

95 900 911 Issue 1 © Heatrae Sadia Heating. 2009.

A division of B A X I G R O U P

Brochures for all of our products are available free of charge. Please call our literature hotline on 01603 420127.

Domestic Heating and Hot Water

- Aerheat
- Electric Solar
- Electromax Solar
- Megaflo Solar
- Multipoint Instantaneous
- Amptec
- Electromax
- Megaflo HE
- Megalife HE
- Showers

Commercial Hot Water

- B3M / C3M
- FBM
- Handy Dri and Hair Drier
- Immersion Heaters
- Streamline
- Express
- Handy
- Hotflo
- Multipoint
- UTC 99

Drinking Water

- SuperChill
- Supreme



This product is printed on 50% post consumer recycled paper. That is paper that has been previously used eg. newspapers and magazines. This product is printed using vegetable based inks which are non toxic. Please recycle this product once you have finished with it.